




Installation

3-phase motor fitted with terminal box

3-phase power supply: 400 Volt - 50 Hz Dahlander

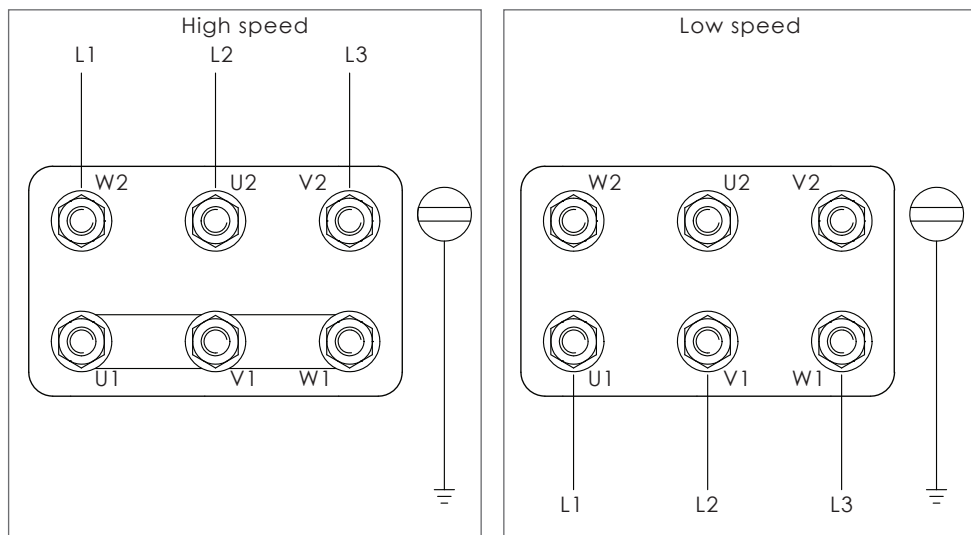

Other voltages and frequencies are available upon request.

Colours of the motor cores

connection	colour	connection	colour
U1	blue	U2	yellow
V1	black	V2	green
W1	brown	W2	red
Power supply (L1, L2, L3)			
Option: GV-therm (purple cores)			